

Requested Patent: EP0859492A2

Title: FAIR QUEUING SYSTEM WITH ADAPTIVE BANDWIDTH REDISTRIBUTION ;

Abstracted Patent: EP0859492 ;

Publication Date: 1998-08-19 ;

Inventor(s):

DUFFIELD NICHOLAS G (US); STILIADIS DIMITRIOS (US); LAKSHMAN
TIRUNELLAI VISWANATHA (US) ;

Applicant(s): LUCENT TECHNOLOGIES INC (US) ;

Application Number: EP19980300754 19980203 ;

Priority Number(s): US19970037844P 19970207; US19970972424 19971118 ;

IPC Classification: H04L12/56 ; H04L29/06 ;

Equivalents: JP10313324

ABSTRACT:

Apparatus for routing packets in a communication network comprises a plurality (100) of per-connection queues (20a–20i), each queue established for receiving packets from a respective source and temporarily storing received packets before routing to a particular destination; a weighted fair-queuing scheduler (40) for servicing packets from each of the plurality of per-connection queues at guaranteed pre-allocated rates; a sensing device for sensing a presence or absence of packets in queues, the absence of packets in queues indicating availability of excess bandwidth; and, a state dependent scheduler (200) for redistributing excess bandwidth upon sensing of queues absent packets, the state dependent scheduler (200) servicing those queues in accordance with a state variable corresponding to a performance property of the queues, wherein delay and isolation properties for routing packets of respective queues in weighted fair-queuing is preserved.



Best Available Copy



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
 19.08.1998 Bulletin 1998/34

(51) Int. Cl.⁶: **H04L 12/56, H04L 29/06**

(21) Application number: **98300754.3**

(22) Date of filing: **03.02.1998**

(84) Designated Contracting States:
AT BE CH DE DK ES FI FR GB GR IE IT LI LU MC
NL PT SE
 Designated Extension States:
AL LT LV MK RO SI

(30) Priority: **07.02.1997 US 37844 P**
18.11.1997 US

(71) Applicant:
LUCENT TECHNOLOGIES INC.
Murray Hill, New Jersey 07974-0636 (US)


(72) Inventors:
 • **Duffield, Nicholas G.**
Hoboken, New Jersey 07030 (US)
 • **Stilladis, Dimitrios**
Middletown, Monmouth, NJ 07748 (US)
 • **Lakshman, Tirunellai Viswanathan**
Eatontown, Monmouth, New Jersey 07724 (US)

(74) Representative:
Buckley, Christopher Simon Thirsk et al
Lucent Technologies (UK) Ltd,
5 Morningside Road
Woodford Green, Essex IG8 0TU (GB)

(54) **Fair queuing system with adaptive bandwidth redistribution**

(57) Apparatus for routing packets in a communication network comprises a plurality (100) of per-connection queues (20a--20i), each queue established for receiving packets from a respective source and temporarily storing received packets before routing to a particular destination; a weighted fair-queuing scheduler (40) for servicing packets from each of the plurality of per-connection queues at guaranteed pre-allocated rates; a sensing device for sensing a presence or absence of packets in queues, the absence of packets in queues

indicating availability of excess bandwidth; and, a state dependent scheduler (200) for redistributing excess bandwidth upon sensing of queues absent packets, the state dependent scheduler (200) servicing those queues in accordance with a state variable corresponding to a performance property of the queues, wherein delay and isolation properties for routing packets of respective queues in weighted fair-queuing is preserved.

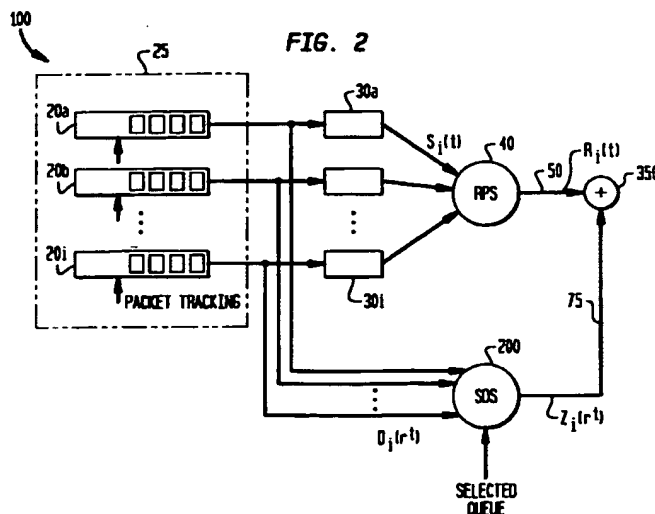

stream, and, the provision of isolation between streams, e.g., a misbehaving source will not effect the flow of other streams. Additionally, an added benefit is that when there is underutilization of capacity, e.g., when flow is particularly bursty and there may be idle time, the WFQ system facilitates the redistribution of the unused bandwidth so as to preserve work-conservation property. Presently, the redistribution property of unused bandwidth capacity among the queues is done in a manner inherited from the fluid-flow model, e.g., in accordance with the weight associated with the particular queue. Thus, when the packet queues are idle, "excess" bandwidth is re-distributed to backlogged connections in proportion to their weights which are based on long-term requirements.

The drawback of GPS that all fair queuing systems inherit in their close emulation of GPS is that GPS severely restricts state-dependent bandwidth sharing. The only state-dependency in GPS is in the number of backlogged connections. There is no further latitude and sharing is determined by the guaranteed rates which are set based on long term needs of the connections. This restriction on bandwidth sharing is more stringent than that necessary to preserve a key of property of fair queuing, the ability to guarantee worst case delay bounds for leaky bucket controlled traffic sources. Consequently, there is no need for fair queuing systems to emulate the possibly suboptimal excess bandwidth sharing of GPS.

It would thus be highly desirable to provide in a weighted fair queuing system emulating GPS, a method of achieving redistribution of unused bandwidth in a state-dependent manner, i.e., that reflects instantaneous needs of the remaining backlogged traffic flows.

Summary of the Invention

The instant invention is a modified approach to weighted fair queuing implementing an adaptive redistribution scheme. In such a scheme, each per connection flow is guaranteed its specified share of the link bandwidth with any excess bandwidth being adaptively redistributed. The scheme enables preservation of fair queuing's ability to provide worst case end to end delay bounds and the schemes work like fair queuing when there is no excess bandwidth. The excess bandwidth may be distributed according to a different criteria. Examples of state dependent criteria are: 1) Longest delay first (LDF) that serves the flow with current longest delay; 2) Least time to overflow (LTO) that serves the flow with minimum difference between maximum allowed delay and current delay; 3) Least time to overflow with leaky buckets (LTO-LB) that serves the flow which would cause buffer overflow first if worst case arrivals happen.

Advantageously, the adaptive bandwidth redistribution scheme always provides the minimum guarantees required for each of the connections and satisfies worst

case fairness measures.

The LDF policy uses excess bandwidth to reduce the variance of the delay distribution which has the added benefit of reducing the playout buffer size for voice and video sources. Simulations with video traces and with voice traffic shows that indeed this policy performs better than GPS without any sacrifice of worst case guarantees. Since the deviation from the maximum allowed delay is not taken into account, flows with small delay bounds (like voice) get almost no excess bandwidth in the presence of flows with large delay bounds. Impreciseness in assigning weights can result in these flows experiencing losses much more than flows with large delay bounds.

The LTO policy tries to minimize packet losses by assigning excess bandwidth under the assumption that the flow which is likely to overflow the quickest has the most instantaneous bandwidth need. In doing so, it takes into account the current deviation of each flow from its maximum allowed delay. Simulations with a mix of CBR, voice, and video sources with very different delay bounds show that this policy reduces losses for all classes as well as reduces the variance of delay for each class. The various features of novelty which characterize the invention are pointed out

with particularity in the claims annexed to and forming a part of the disclosure. For a better understanding of the the invention, its operating advantages, and specific objects attained by its use, reference should be had to the drawings and descriptive matter in which there are illustrated and described preferred embodiments of the invention.

Brief Description of Drawings

FIG. 1 is a general data flow diagram illustrating the features of the weighted fair queuing and a rate proportional Server.

FIG. 2 illustrates the weighted fair queuing scheduling system of the invention.

Detailed Description of the Invention

Figure 2 is a general block diagram illustrating the fair queueing method with adaptive excess bandwidth redistribution. The system consists of a set of queues 100, a shaper device 30a,...30i associated with each queue, and Weighted Fair Queueing Server or Rate Proportional Server 40 and a State Dependent Server (SDS) 200. Packets are temporarily stored in the queues 20a,...20i. A weight is assigned with each of these queues representing the portion of the output bandwidth that must be allocated to the packets arriving in each of the queues. The shaper device is forwarding packets from the queues to the Weighted Fair Queueing Server with a rate exactly equal to the allocated. This scenario enables excess bandwidth to become available for redistribution. In accordance with the principles

of the invention, traffic from another source, i.e., another queue, may be directed to the adaptive bandwidth redistribution mechanism, which is hereafter referred to as state dependent scheduler 200. It should be understood to skilled artisans that the hardware architectures for implementation of the per-connection queues, shaper devices, and schedulers may vary, without diverting or straying from the principles of the invention described herein.

As described above, the shaper releases packets to the scheduler with a rate exactly equal to the allocated rate. The service offered by the shapers 30a,...,30i to the respective queue connections "i" during an interval of time is denoted by $S_i(\tau, t)$ in Figure 2. It is assumed that packets are transferred from the shaper to the scheduler with infinite capacity. The service offered by the rate proportional scheduler 40 is denoted as $R_i(\tau, t)$.

Packets that have not become eligible for service remain in the corresponding connection queue in the shaper, while all the eligible packets wait for service in the RPS Scheduler queue 40. Service is always provided from the RPS scheduler queues 40, as long as packets are available there. When all of the scheduler queues are empty, the state SDS 200 is invoked to select a packet from the queues 20a,...,20i for transmission with the service offered to a connection not affecting the state of the shaper 30. As shown in Fig. 2, the service offered by the shaper 30 to the queue connection "i" during an interval of time is denoted by $D_i(\tau, t)$ and the service offered by the state dependent scheduler 200 is denoted as $Z_i(\tau, t)$.

The shaper device 30 can be implemented using a calendar queue that is a well known mechanism to any skilled artisans. A description of the calendar queue mechanism for shaping has been presented in D. Stiliadis and A. Varma: A General Methodology for Designing Scheduling and Shaping Algorithms, in Proceedings of IEEE INFOCOM '97.

The Rate Proportional Server (Weighted Fair Queueing Server) 40 can be implemented using any known fair queueing mechanisms of which there are several known to those skilled in the art. Examples are D. Stiliadis and A. Varma: Traffic Scheduling System and Method for Packet-Switched Networks, U.S. Patent Application, Serial No. 08/634,904, filed April 15, 1996.

At some point of time, if it is determined that there are no packets in the RPS scheduler, then this is an indication of free bandwidth. Thus, packets may be served by the SDS 200 based on a state dependent manner. By state dependent manner, it is meant that the decision is based on the current state of some variables related to the system. Two examples of state dependent decisions are Longest Delay First and Least Time to Overflow.

In the Longest Delay First, the scheduler SDS 200 selects among the queues 20a,...,20i, the one that has the packet that will see the longest delay if this queue is served with a rate equal to guaranteed. To do that, the scheduler assigns to each queue a delay value that is

equal to the size of the queue divided by the guaranteed rate. This value describes the delay that the last packet of this queue will see. The SDS 200 selects the queue with the maximum such value using any mechanism for selecting the maximum value among a set of numbers. The selection mechanism is a well known method to any skilled artisan.

In the Least Time to Overflow mechanism, the SDS scheduler 200 selects among the queues 20a,...,20i that queue which is likely to overflow in the shortest time. The mechanism assumes that a maximum size is associated with a queue. Every time a packet arrives or is serviced by a queue, a packet-to-overflow variable counts the number of packets that can be added to the queue without exceeding its maximum capacity. A second variable, denoted as time-to-overflow, indicates the expected time to overflow and is calculated by dividing the packet-to-overflow variable by the associated rate. The SDS 200 selects for transmission the queue with the minimum time-to-overflow variable. The minimum is determined by any of the well known mechanisms to anyone skilled in the art. Although the above variables explain two methods for calculating state

dependent variables, other similar methods may be used. Based on the state dependent variables, the scheduler mechanism 200 will direct packets from the selected queues over separate link 75 where the packet will be multiplexed by multiplexer element 350 and forwarded to its next destination.

It should be understood that the property of worst case fairness is also satisfied in the system of the invention. In worst case fairness, the servicing of queues of different lengths at different allocated rates is interleaved such that a packet from a first queue is serviced at time t_1 and the packet of a second queue is serviced at a time t_2 . In the invention, the measure of worst case fairness is satisfied, such that, the time interval $t_2 - t_1$, in the worst case, is less than or bounded by a value that is not a function of the number of connections, but is a function of the packet size of the longest queue, e.g., the queue serviced at time t_1 and the allocated rate of that longest queue.

Thus, the property of worst case fairness is satisfied by the implementation of the SDS 200 in the weighted fair queueing system of the invention.

The foregoing merely illustrates the principles of the present invention. Those skilled in the art will be able to devise various modifications, which although not explicitly described or shown herein, embody the principles of the invention and are thus within its spirit and scope.

Claims

1. Apparatus for routing packets in a communication network comprising:

a plurality of per-connection queues, each queue established for receiving packets from a

respective source and temporarily storing received packets before routing to a particular destination;

weighted fair queuing scheduling means servicing packets from each of said plurality of per-connection queues at guaranteed pre-allocated rates;

means for sensing a presence or absence of packets in queues, said absence of packets in queues indicating availability of excess bandwidth; and,

state dependent scheduling means for redistributing excess bandwidth upon sensing of queues absent said packets, said state dependent scheduling means servicing those queues in accordance with a state variable corresponding to a performance property of said queues,

wherein delay and isolation properties for routing packets of respective queues is preserved.

sensing a presence or absence of packets in queues, said absence of packets in queues indicating availability of excess bandwidth; and, for redistributing excess bandwidth upon sensing of queues absent said packets, said state dependent scheduling means servicing those queues in accordance with a state variable corresponding to a performance property of said queues, while preserving delay and isolation properties for routing of said packets.

2. Apparatus for routing packets in a communication network as claimed in Claim 1, wherein a said performance property of a queue includes the queue having the greatest amount of packets, said corresponding state variable being longest queue first.
3. Apparatus for routing packets in a communication network as claimed in Claim 1, wherein a said performance property of a queue includes that queue having a packet waiting to be serviced in the longest amount of time, said corresponding state variable being longest delay first.
4. Apparatus for routing packets in a communication network as claimed in Claim 1, wherein a said performance property of a queue includes the queue most likely to overflow buffer memory containing said queue, said corresponding state variable being most likely to overflow buffer.
5. Apparatus for routing packets in a communication network as claimed in Claim 1, wherein a worst case fairness measure for said connections is satisfied.
6. Method for routing packets in a communication network comprising:

establishing a plurality of per-connection queues, each queue for receiving packets from a respective source and temporarily storing received packets before routing to a particular destination;

servicing packets from each of said plurality of per-connection queues at guaranteed pre-allocated rates;

FIG. 1


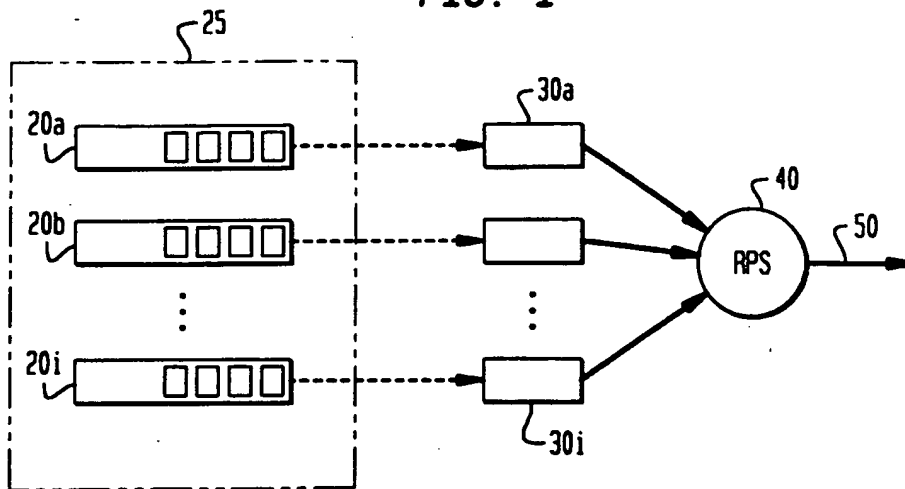


FIG. 2

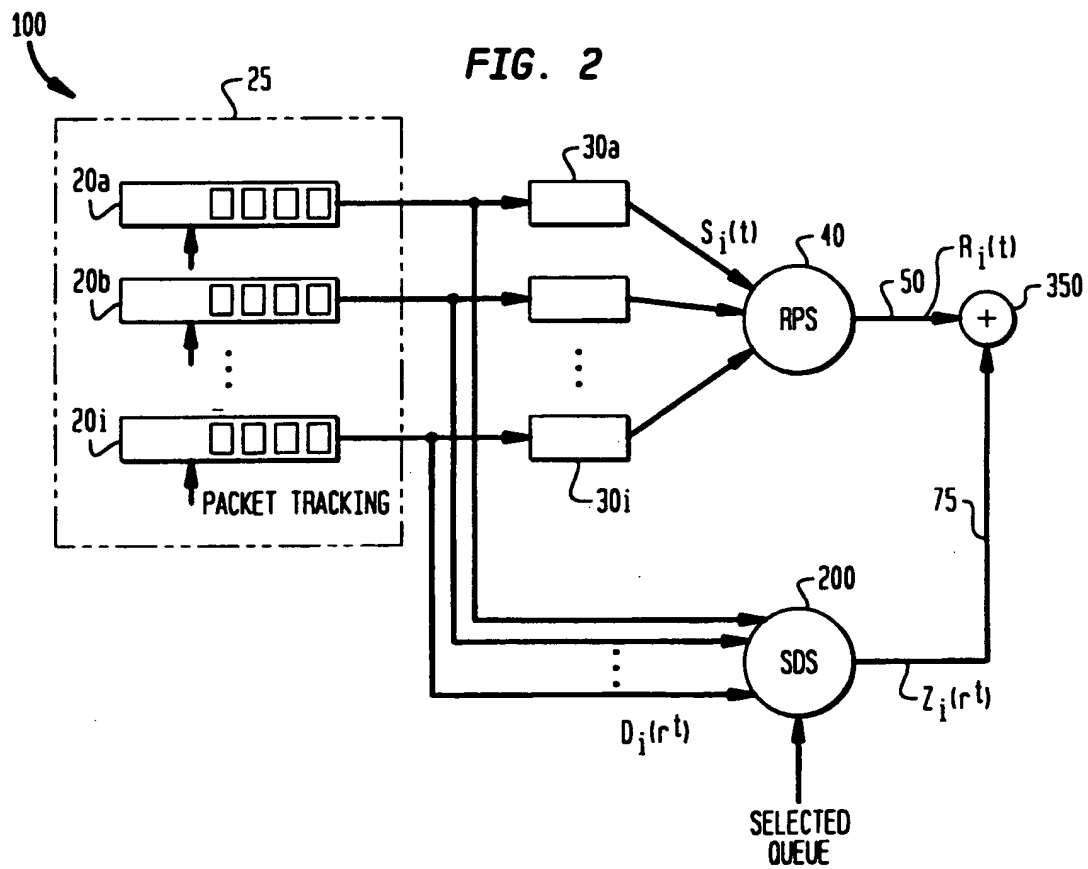

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.